## **COMACCHIO GEO300 DATA SHEET**

The Comacchio GEO300 is a versatile rotary drilling rig capable of completing a wide range of ground investigations.

## Capabilities include;

- ➤ Tier IV engine to work inside designated metropolitan low Emissions Zones.
- Constructing boreholes to depths of in excess of 60 metres.
- Conventional rotary coring.
- Wire line rotary coring including Geobor-S and PQ3 systems.
- Dynamic sampling.
- > SPTs.
- ▶ U100s and UT100s.
- ► Hollow stem augers up to 300mm diameter.
- Rotary Open holing
- Capable of utilising various flush types; air, air mist, water, muds and polymers
- Rubber tracks that minimise disturbance when tracking.
- Built in automatic SPT hammer








## **COMACCHIO GEO300 DATA SHEET**

| When being transported |       |
|------------------------|-------|
| Length                 | 4.52m |
| Width                  | 1.30m |
| Height                 | 2.47m |
| When set up to drill   |       |
| Length                 | 3.90m |
| Width                  | 1.80m |
| Height                 | 4.52m |
| Weight: 3900kg         |       |

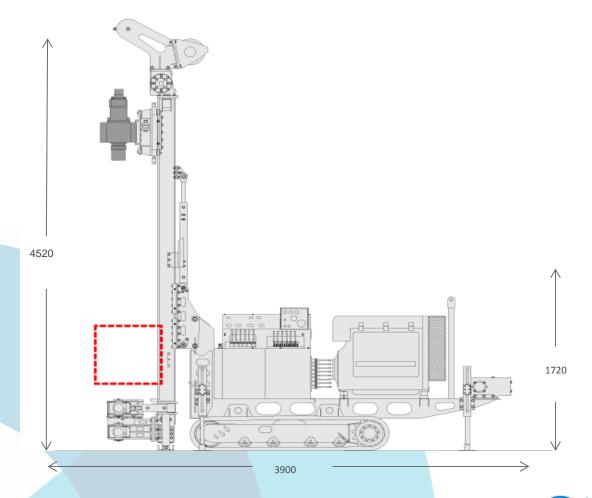



Contact: salesuk@socotec.com