COMACCHIO GEO405 HT DATA SHEET

The Comacchio GEO405 HT is a versatile rotary drilling rig capable of completing a wide range of ground investigations.

Capabilities include;

- ► Tier IV engine for working inside the London Low Emissions Zone
- Constructing boreholes to depths of plus 100 metres
- Conventional rotary coring
- Wire line rotary coring including Geobor-S and PQ3 systems
- Dynamic sampling
- SPTs
- U100s and UT100s
- Hollow stem augers up to 300mm diameter
- Rotary Open holing
- Capable of utilising various flush types; air, air mist, water, muds and polymers
- Rubber track inserts that minimise disturbance when tracking
- Power washer
- Casing extractor with up to 9,000kg pull back






Contact: salesuk@socotec.com

COMACCHIO GEO405 HT DATA SHEET

When being transported	
Length	7.60m
Width	1.75m
Height	2.60m
When set up to drill	
Length	4.90m
Width	1.75m
Height	7.60m
Weight: 7200kg	

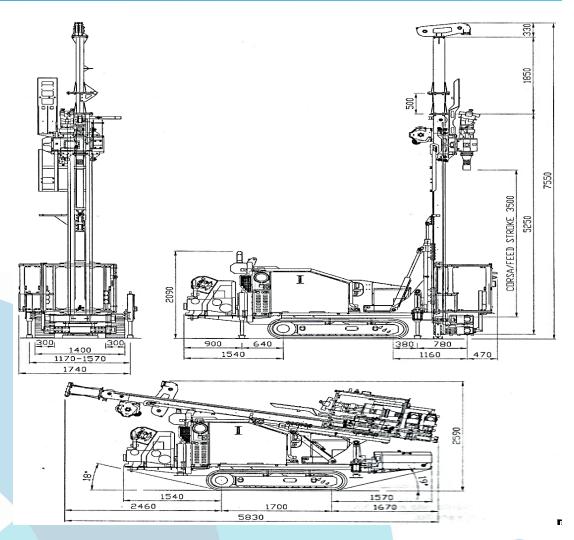



Contact: salesuk@socotec.com